



RunCam Phoenix 2 SPV5


User Manual

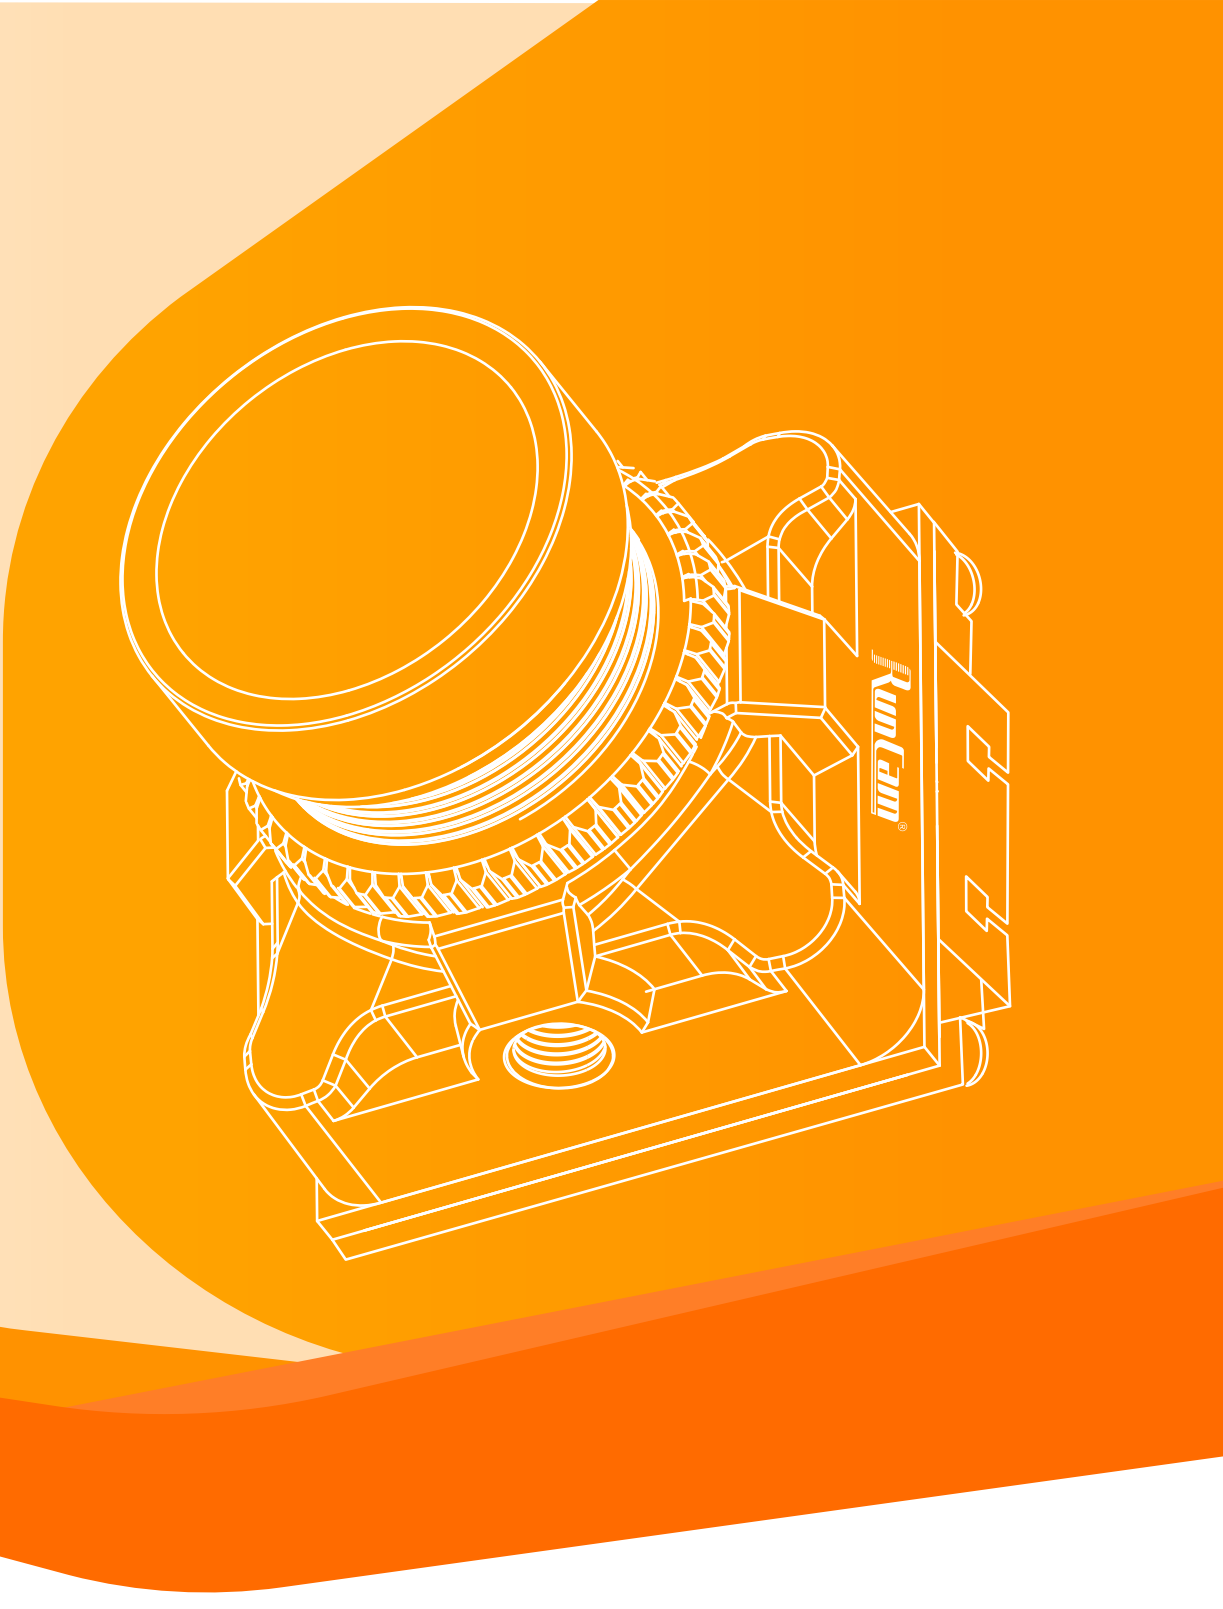

01/Joystick Control

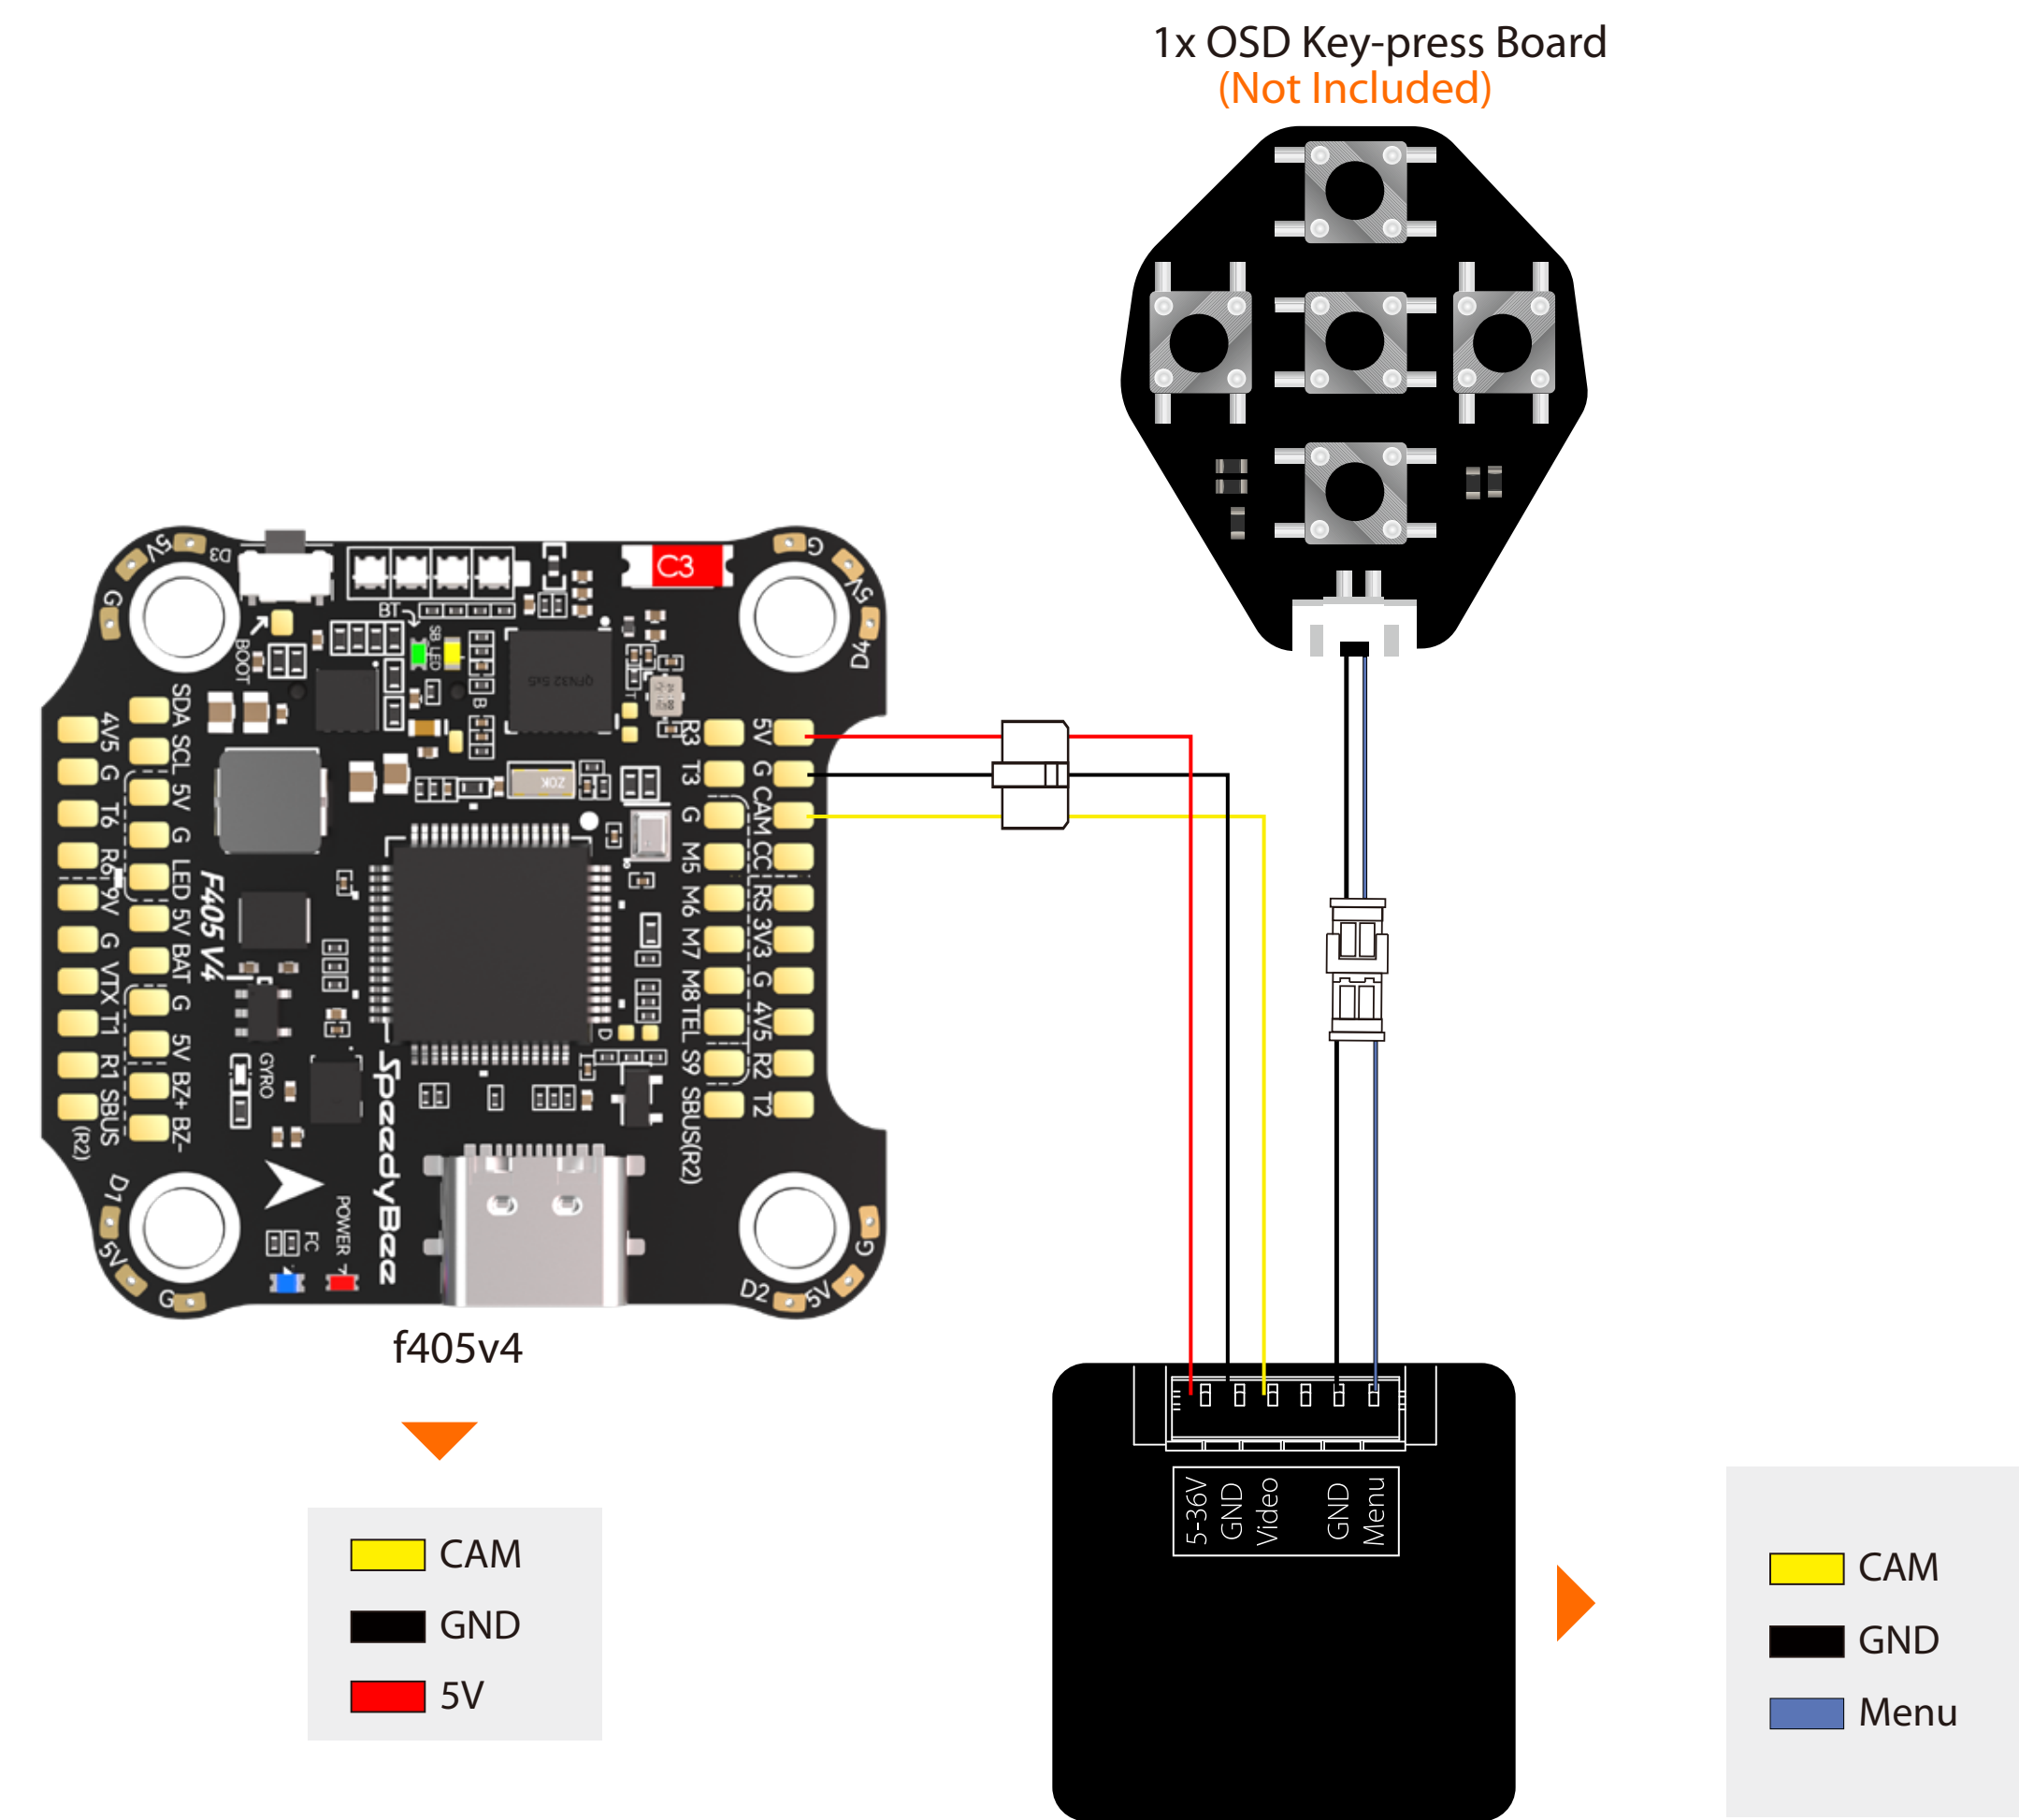

02/Dimensions

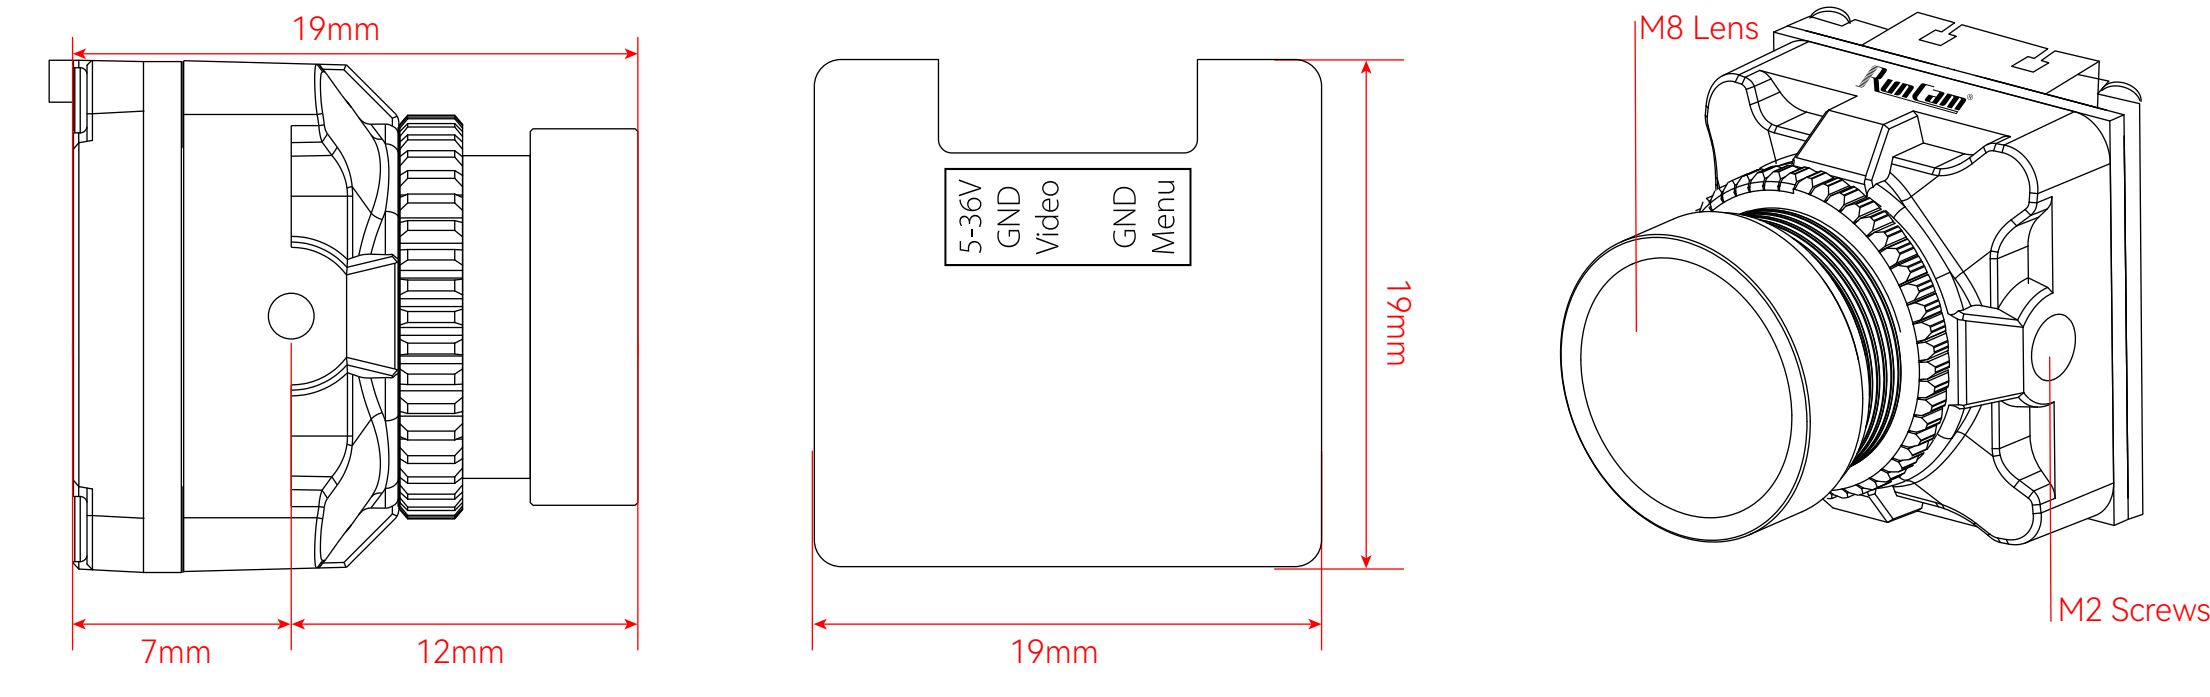

03/Camera Menu

MAIN

AE

IMAGE

VIDEO OUTPUT

LANGUAGE

RESET

SAVE&EXIT

EXIT

LANGUAGE

English/Chinese

EXPOSURE

NORMAL BRIGHTNESS

HIGHLIGHT BRIGHTNESS

LOWLIGHT BRIGHTNESS

MAX GAIN

ANTI FLICKER

FAST MODE

NIGHT MODE

BRIGHT STYLE

RETURN

ANTI FLICKER

OFF/60Hz LOW/50Hz LOW/
60Hz HIGH/50Hz HIGH

FAST MODE

OFF/ON

NIGHT MODE

OFF/LOWER/LOW/MID/HIGH/
HIGHER/MAX

IMAGE

CONTRAST

SATURATE

COLOR PREFERENCE

RED GAIN

BLUE GAIN

SHARPNESS

AI NR

RETURN

AI NR

OFF/LOWER/LOW/MID/HIGH/
HIGHER/MAX

VIDEO OUTPUT

FLIP

MIRROR

STANDAPD

IMAGE RATIO

RETURN

STANDAPD

NTSC/PAL

IMAGE RATIO

4:3/16:9

RESTORE OR NOT

NO

YES

滚滚长江东逝水

04/Parameters

Model	Phoenix 2 SPV5	
Image Sensor	1/3" BSI CMOS	
Horizontal Resolution	1200TVL	
Lens	FOV D:155° H:123° V:96°	FOV D:140° H:123° V:74°
Screen Format	4:3	16:9
Mirror/Flip	Available	
Signal System	NTSC/PAL	
Shutter	Rolling Shutter	
Sensitivity	13000 mV/lux·s	
WDR	Global WDR	
Day/Night	Color	
Menu Control	Cable Control	
Power	DC 5-36V	
Current	95mA@5V	45mA@12V
Housing Material	ABS	
Net Weight	7.5g (without cable)	
Dimensions	19mm*19mm*19mm (M2 Screw)	